

Dual control unit

TECHNICAL FEATURES



Description


Control unit with quartz synchronization for the management of alternate one-way. Usable inside the battery case of the cart.

ELECTRICAL FEATURES

| | |
|------------------------------------|--|
| Power supply | 12 Vdc (11,5 ÷ 13 Vdc) |
| Power consumption @ 12 Vdc | 0.5 W |
| Synchronization | Quartz synchronization |
| Memory time (without power supply) | 4 min and 30 sec |
| Operating mode | Automatic; Flashing; Manual; Standby (off without losing of synchronism) |
| Connections | Battery clamps |
| Protections | Short circuit |
| Insulation class | Class III |

MECHANICAL FEATURES

| | |
|-----------------------|--------------------------------|
| Operating Temperature | -10 °C ÷ +55 °C |
| Weight | 255 g (without battery clamps) |
| Dimensions | 100 x 175 x 36 mm |
| Material | Plastic |

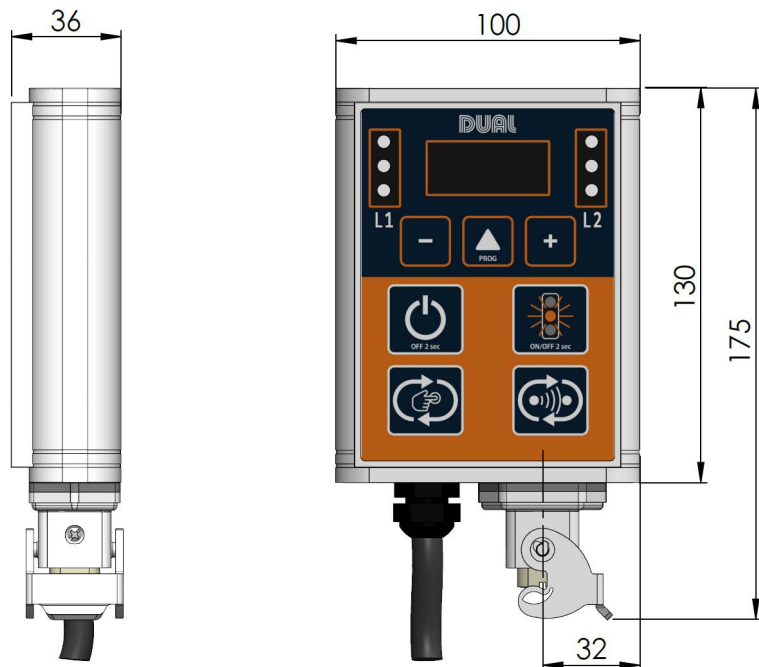

Rev. 3.0
25/01/2024

Approved TEC

Approved AQ