



Basic 201

Some examples of applications:

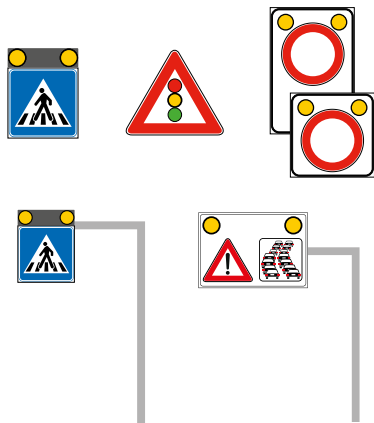

Basic 201 is the flat version of the Basic 200.

The high luminous efficiency, the uniformity and the wide visual angles, make this product the best in its category.

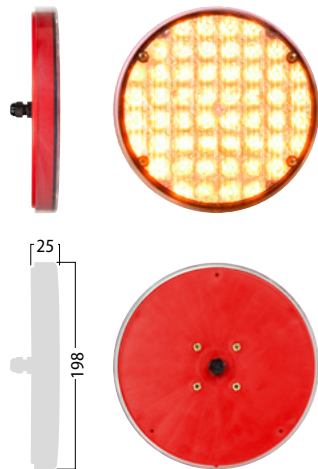

Certification	EN12352 L8H - L8M
Input voltage	12 VDC - 12/24 VDC
LED colour	● ● ● ○
Max. power consumption	7.8 W
Dimensions	Ø 198 x 25 mm

Flashing	Power cons. @12V	
Flash LED (10%)	1.6 Ah	/day
Tri Flash (5%+5%+5%)	2.3 Ah	/day
Single (50%)	7.8 Ah	/day
Steady	15.6 Ah	/day

FL (FlashLed) 10% * on time 50%