



Basic 308

Some examples of applications:

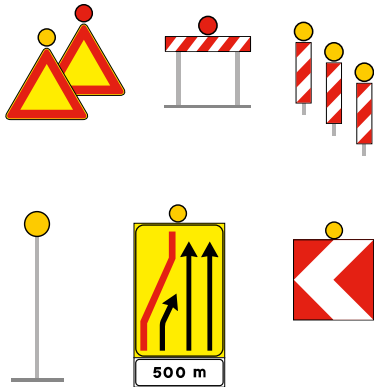

Adapter for Ø40 mm panels



Basic 308 is a LED warning light for temporary use. The high luminous efficiency, the uniformity and the wide visual angles, make this product the best in its category.

Compliance	EN12352 L9M
Input voltage	12 VDC - 12/24 VDC
LED colour	● ●
Max. power consumption	17.5 w
Dimensions	Ø 333 x 110 mm

Flashing	Consumi @12V	
Flash LED (10%)	3.0 Ah	/day
Tri Flash (5%+5%+5%)	4.5 Ah	/day
Single (50%)	15 Ah	/day
Steady	30 Ah	/day