

Dividing marker

Ideal for junctions, cusps and other dangerous spots.

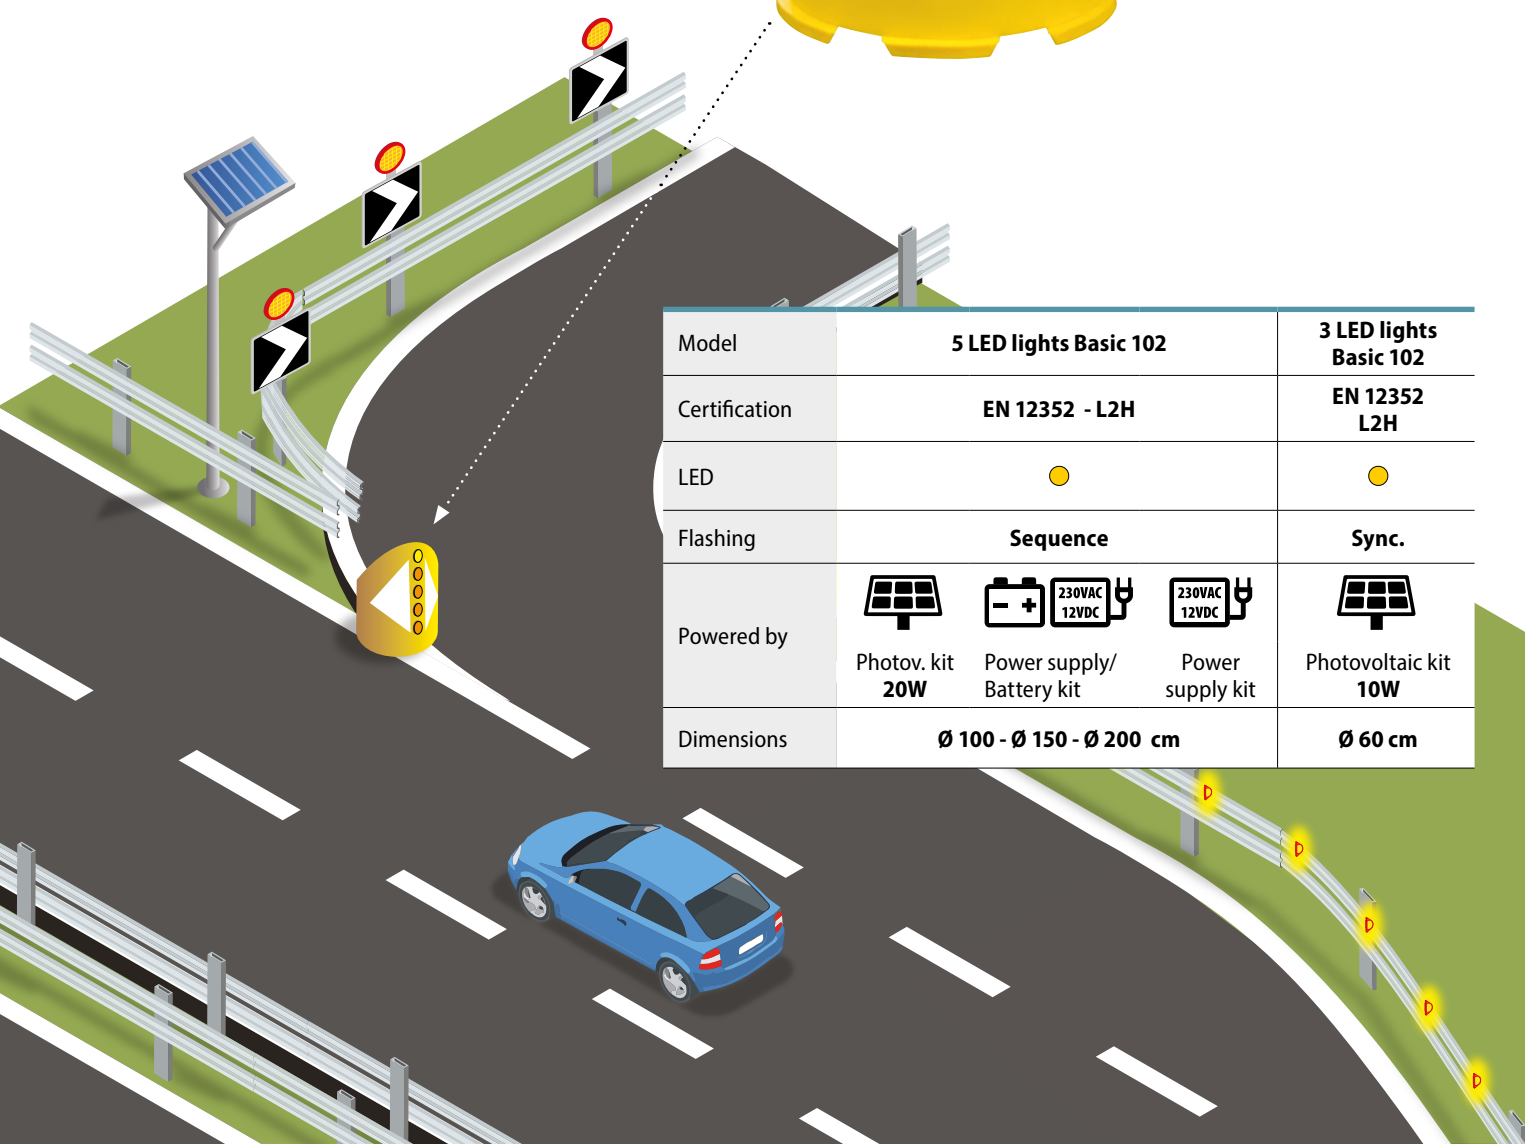
Operating with photovoltaic panel or 230 VAC.







LED Basic 102 sequential.

Arrows in Class 2 film.

Shock resistant.

Various sizes available.



Model	5 LED lights Basic 102	3 LED lights Basic 102
Certification	EN 12352 - L2H	EN 12352 L2H
LED		
Flashing	Sequence	Sync.
Powered by	  	
Dimensions	Ø 100 - Ø 150 - Ø 200 cm	Ø 60 cm