

Kronos


Luminous LED insert with very low power consumption.



Ideal for cuspidal points, roundabouts and fatal edges.

Ready for installation.

Suitable to photovoltaics.

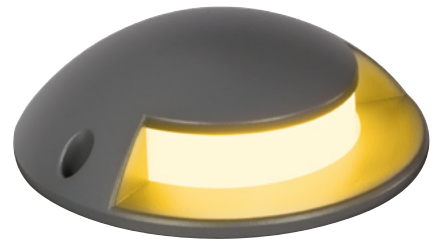

LED colour	● ○	Other colours on request	
Light	Steady	Sync. flashing with external flashing control unit	Sequence with external control unit
Powered by	12 VDC 230 VAC classe II	Max. power consumption	6 W
Material	Die cast aluminum body PP formwork		
Dimensions	ø145 x 136 mm	Dome height	45 mm

